

PEGA



Hoist Torque
AUSTRALIA
'Taking you to new heights'

Rack and pinion passenger/goods hoist

Without counterweight - single or twin operation

PEGA 2837 TD VFC HS

TECHNICAL DATA

CAPACITY

Payload capacity	2800 kg
Passengers	34
Erection load	1000 kg
Speed	0-100 m/min
Rated lifting height	200 m
Other lifting height on request	
Maximum tie spacing	12 m

DIMENSIONS

Internal width x length	1,5x3,7 m
Internal minimum height	2,69 m
Door opening w x h	1,43x2,0 m
Mast section length	1,508 m

ELECTRICAL DATA

Power supply	380-460V 3Ph 50Hz
Drive unit PEGA-SEW Eurodrive	
Power cable guiding system:	Collecting basket or cable trolley

WEIGHTS

Base unit and enclosure	4200 kg
Cage weight	2800 kg
Mast section with 1 rack	151 kg
Mast section with 2 racks	174 kg


Standard:

All lifts equipped with frequency controlled drives



Variety of optional equipment

Different masts and tie- systems to meet all kind of application demands

Doors installations in different positions and combinations

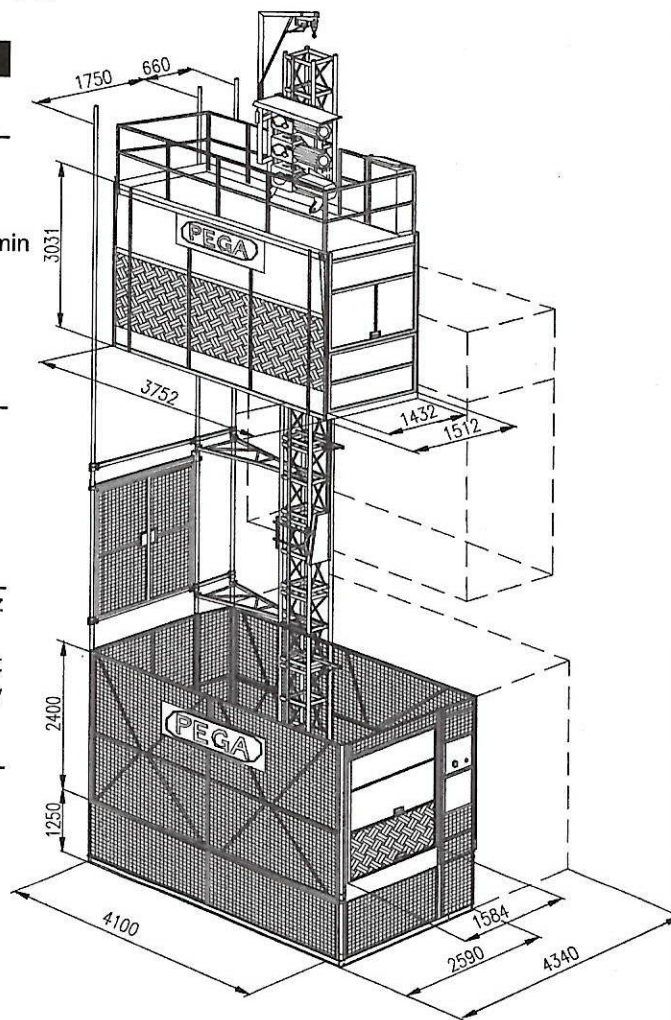

CONSULT - RENT - SALE - SERVICE

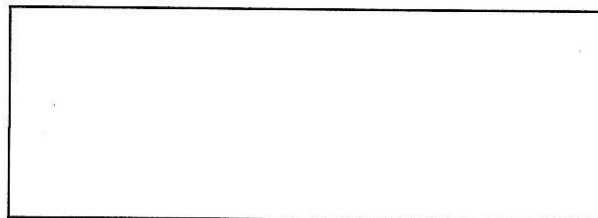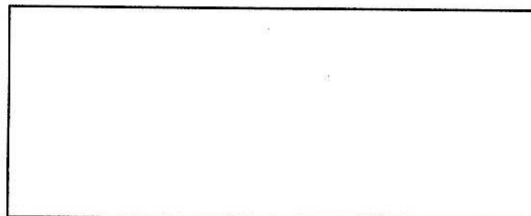

Picture is illustrative only and do not necessarily show the configuration on the market at a give point of time. Products must be used in conformity with safe practice and applicable statues regulations, codes and ordinances. Specifications of products and equipment shown herein are subject to change without notice.